



# HIGH TEMP PUMPS



Scan this QR Code for more information


- Heat Treated Crankshaft
- Solid Ceramic Plungers
- Nickel Plated Brass Manifold
- Stainless Steel Valve Caps
- Stainless Steel Piston Guides and Check Valves
- Industrial Quality Ball Bearings and Needle Bearings
- High Temperature Seals for Hot Water Applications
- 11.5 oz. Capacity Vented Oil Bath Crank Case
- 1/2" BSP-F Inlet. 3/8" BSP-F Outlet
- Max Fluid Temp, 185°F

## PKWT Series 24mm Keyed Solid Shaft

	Model	GPM	l/min	PSI	bar	Power Req.	Seal Kit	Valve Kit	Wt.
1450 RPM	PKWTC 11/15 S	2.9	11.0	2175	150	4.2 EBHP	6061.B1 (Kit 108)	6061.D7 (Kit 132)	13.5 lbs
	PKWTC 13/15 S	3.4	13.0	2175	150	5.0 EBHP	6061.B1 (Kit 108)	6061.D7 (Kit 132)	13.5 lbs

**Rail Kit 8702.10** Standard 7/8" Rail Kit for P Series Solid Shaft Pumps

NOTE: All pump models available with left-hand drive option. Add 'L' to model number when ordering (ex. PKWTC 13/17 SL)

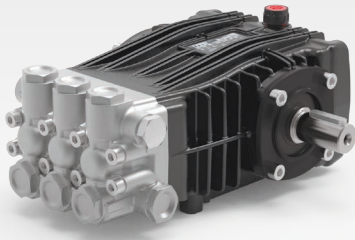

Scan this QR Code for more information


- Nickel Plated Brass Manifold
- Stainless Steel Valve Caps
- Heat Treated Crankshaft
- Stainless Steel Piston Guides and Check Valves
- High Temperature Seals for Hot Water Applications
- Industrial Quality Tapered Roller Bearings
- Solid Ceramic Plungers
- Replaceable PTFE Coated Body Guides
- 15.4 oz. Capacity Vented Oil Bath Crank Case
- 1/2" BSP-F Inlet. 3/8" BSP-F Outlet
- Max Fluid Temp, 185°F

## BWT Series 24mm Keyed Solid Shaft

	Model	GPM	l/min	PSI	bar	Power Req.	Seal Kit	Valve Kit	Wt.
1450 RPM	BWTC 15/20 S	4.0	15.0	2900	200	7.7 HP Electric	6061.28 (Kit 28)	6930.01 (Kit 283)	20 lbs
	BWTC 18/20 S	4.9	18.5	2900	200	9.5 HP Electric	6061.28 (Kit 28)	6930.01 (Kit 283)	20 lbs
	BWTC 21/20 S	5.5	21.0	2900	200	10.8 HP Electric	6061.28 (Kit 28)	6930.01 (Kit 283)	20 lbs

**Rail Kit 8702.10** Standard 7/8" Rail Kit for P Series Solid Shaft Pumps

NOTE: All pump models available with left-hand drive option. Add 'L' to model number when ordering (ex. BWTC 21/20 SL)

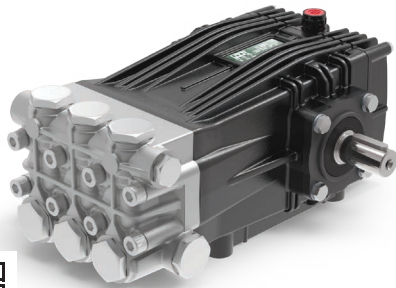

Scan this QR Code for more information

- Solid Ceramic Plungers
- Stainless Steel Check Valves
- Heavy Duty Plated Brass Manifold with External and Internal Bracing
- High Temperature Seals for Hot Water Applications
- Large Diameter Stainless Steel Valve Caps with Increased Thread Depth
- Reinforcing Ring on Inlet and Discharge Ports
- Deeper Back Cover for Increased Oil Capacity
- 35 oz. Capacity Vented Oil Bath Crank Case
- 3/4" BSP-F Inlet. 3/8" BSP-F Outlet: 5.5 - 8.5 GPM
- 3/4" BSP-F Inlet. 1/2" BSP-F Outlet: 9.0 GPM & Above
- Max Fluid Temp, 185°F

## CWT Series 24mm Keyed Solid Shaft

	Model	GPM	l/min	PSI	bar	Power Req.	Seal Kit	Valve Kit	Wt.
1450 RPM	CWTC 27/20 S	7.1	27.0	2900	200	13.8 EBHP	6061.C2 (UD-118)	6061.B9 (UD-116)	35 lbs
	CWTC 34/20 S	9.0	34.0	2900	200	17.4 EBHP	6061.C2 (UD-118)	6061.B9 (UD-116)	35 lbs
	CWTC 42/17 S	11.6	44.0	2465	170	19.2 EBHP	6061.C2 (UD-118)	6061.B9 (UD-116)	35 lbs
	CWTC 50/15 S	13.2	50.0	2175	150	19.2 EBHP	6061.C2 (UD-118)	6061.B9 (UD-116)	39 lbs
	CWTC 70/15 S	18.5	70.0	2175	150	36.9 EBHP	6700.03 (UD-296)	6072.26 (UD-284)	39 lbs

**8702.08** Standard 7/8" Rail Kit for C Series Solid Shaft Pumps

**Rail Kit 8702.07** Medium 1-3/4" Rail Kit for C Series Solid Shaft Pumps

**8702.25** Tall 2-1/2" Rail Kit for C Series Solid Shaft Pumps

NOTE: All pump models available with left-hand drive option. Add 'L' to model number when ordering (ex. CWTC 42/17 SL)